

KINGTEX

KLD SERIES

STEPPING MOTOR TYPE DIRECT-DRIVE
ONE-NEEDLE LOCKSTITCH SEWING MACHINE


步進款直驅單針平縫機



KLD2000


機型編號說明

MODEL NUMBERING

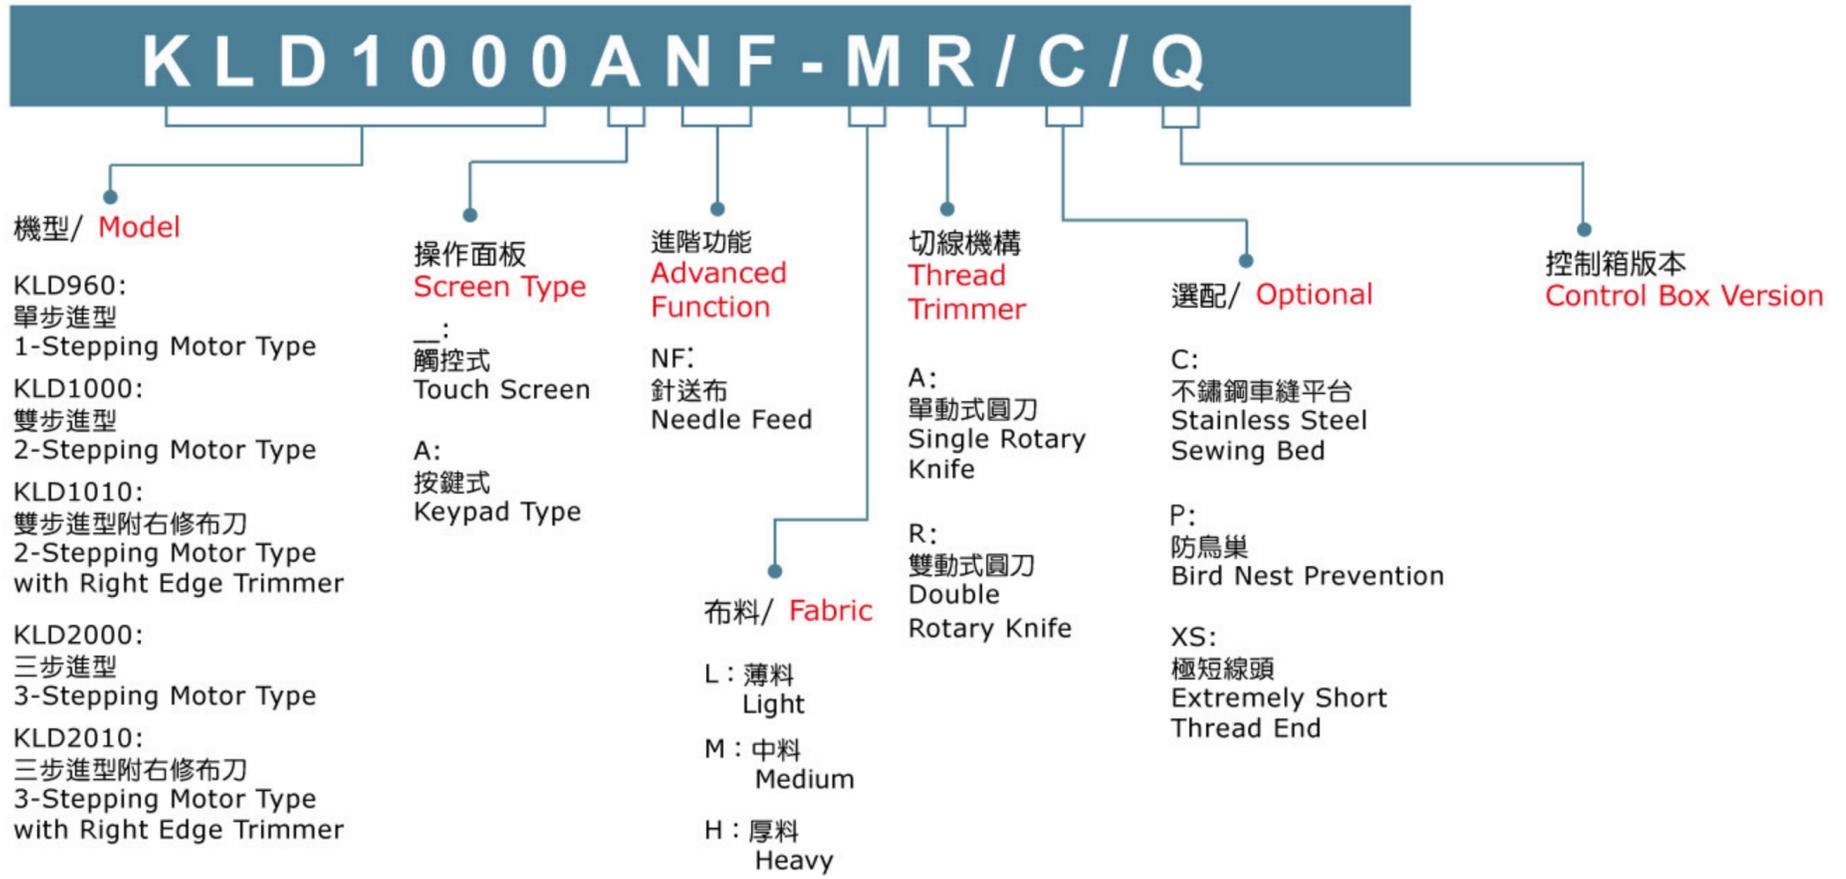



KLD2000 / KLD2000A 特別說明

KLD2000 / KLD2000A Special Features

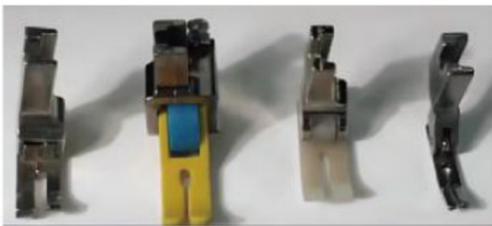

可依車縫需求搭配各種壓腳，不需專用壓腳。

Various presser feet are applicable according to sewing applications, without requiring the special presser foot.

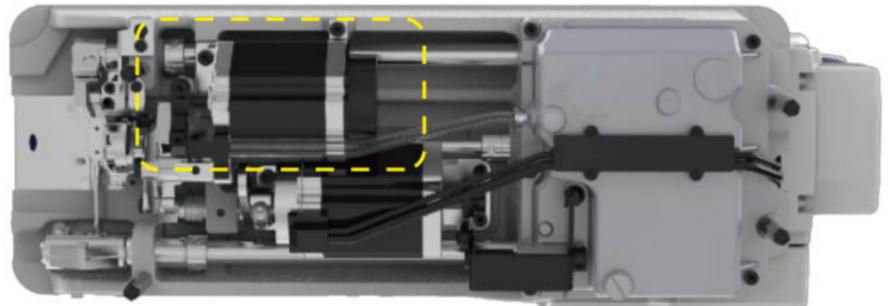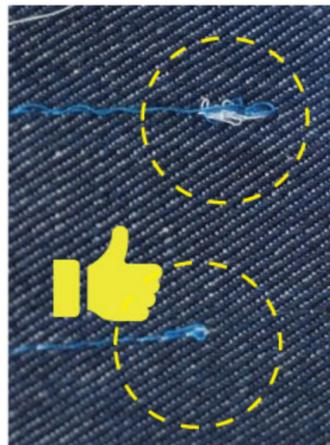

在雙步進的基礎上，再增加一個步進馬達，以「雙電機剪線」的架構，實現剪線後無鳥巢的效果，並且在針板底下完成剪線動作，針板上方不需加裝專用壓腳或配件，操作自由度高。


Based on the dual-stepping motor configuration, an additional stepping motor is added to create a "dual-motor thread trimming" structure. This design achieves a thread-trimming effect without bird's nests after cutting, and the trimming action is completed beneath the needle plate. No special presser foot or additional accessories are required above the needle plate, providing a high degree of operational flexibility.

KLD 2010 特別說明

KLD 2010 Special Features


以馬達直接驅動切刀：不以主軸機構驅動，切刀的行程、同步可調，可提前或延後切布。一鍵輕鬆調節升降。

Motor direct-drive trimmer: As the trimmer is not connected to main shaft, the stroke, synchronized timing are adjustable, which makes the fabric trimming earlier or later as you like. The knife lifting is by pressing a button, so easy!

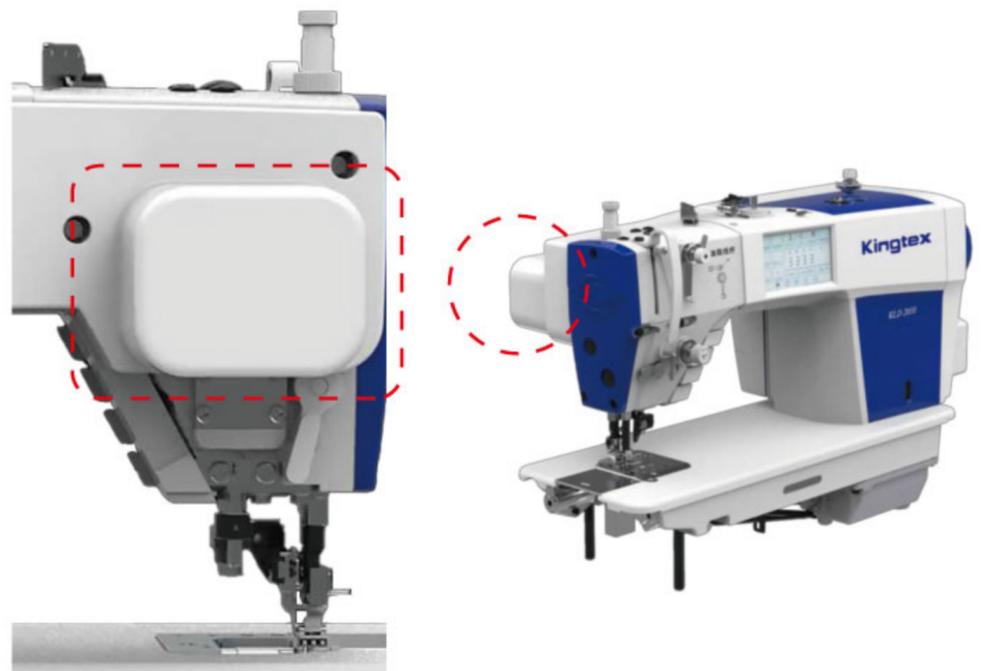

共通特點
General Features


KINGTEX

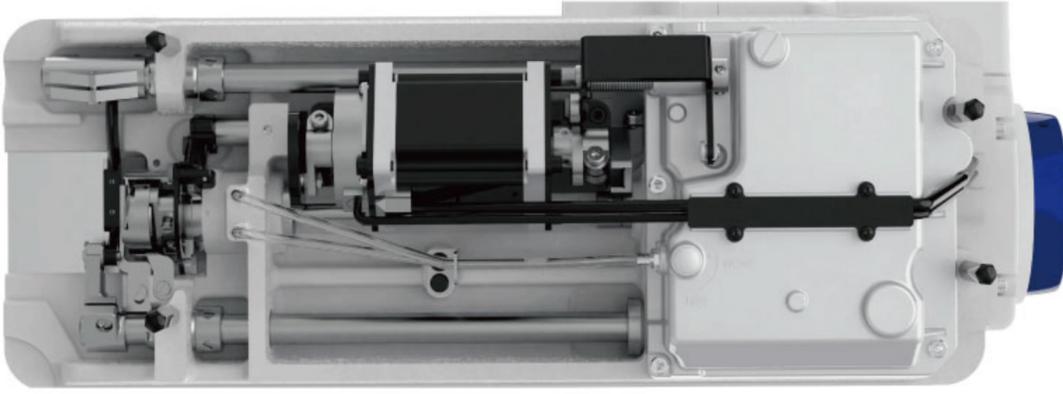

以步進馬達驅動切線，抬壓腳，倒縫，針距控制，動作穩定安靜。密封油盤確保作業乾淨無油污。
The stepping motors drive to thread trimmer, presser foot lifter, reverse stitch, and stitch length. The motion is stable and quiet. The sealed oil tank ensures clean sewing operation.



功能鍵與 LED燈整合於工作區上方，操作方便。
The function keys and LED light are integrated above the working area for easy operation.

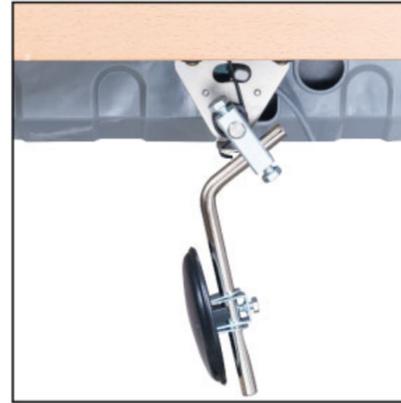


電子膝動抬壓腳，順應原有車縫習慣，更省力
With e-Knee controller, it follows the operator's habit of presser foot lifting.



選配：不鏽鋼車縫板。
Optional: Stainless steel sewing bed cover.



雙動刀切線，實現短線頭效果
Double rotary knife makes shorter remaining thread.

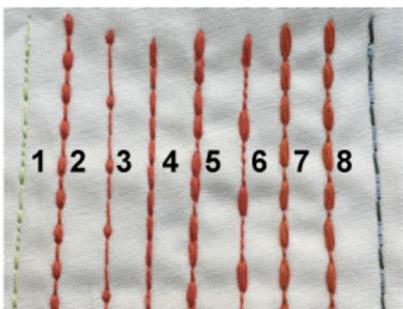

由步進馬達控制，可設定花樣縫。
Due to Stepping motor control, special stitch patterns can be realized.



車縫結束時可準確倒縫，也可設定密縫。
The end of stitch can be back tack accurately and can be condensed stitch.

針送與右修布刀機型/ 外觀差異
Needle-feeding & Right Edge Trimming / Outer Differences





KLD1000 NF



KLD1010



KLD1010 NF

	 m.m.	步進馬達 Stepping Motor		 M	 m.m.			 Rotary	 mm	 DB x 1	 S.P.M.
KLD960 A-M R KLD960 A-H R	0~5.5	1	微油 Micro	M H	H:6 K:10	-	-	雙動刀 Double	5mm	#7~16	5000
KLD1000 A-M R KLD1000 A-H R	0~6	2	微油 Micro	M H	H:6 K:10	-	-	雙動刀 Double	3mm 1.5mm	#7~16	4500
KLD2000 A-M R KLD2000 A-H R	0~6	3	微油 Micro	M H	H:6 K:10	-	-	雙動刀 Double	2mm	#7~16	4500
KLD2000 -M R KLD2000 -H R	0~6	3	半乾式 semi-dry	M H	H:6 K:10	-	-	雙動刀 Double	2mm	#7~16	4500
KLD1000 NF-M R KLD1000 NF-H R	0~5	2	微油 Micro	M H	H:6 K:12	-	●	雙動刀 Double	3mm	#7~16	4500
KLD1010-M A	0~6	2	微油 Micro	M	H:6 K:10	●	-	單動刀 Single	10mm	#7~16	4500
KLD1010-NF-M A	0~5	2	微油 Micro	M	H:6 K:10	●	●	單動刀 Single	10mm	#7~16	4500
KLD2010-M A KLD2010-H A	0~5.5	3	半乾式 semi-dry	M H	H:6 K:10	●	●	單動刀 Single	10mm	#7~16	4000

- **KLD1000A** 標準3mm，極短線頭1.5mm 需搭配選配 XS 套件
KLD1000A Standard 3mm, Extremely short 1.5mm requires the optional kit XS.
- **KLD2000A** 標配防鳥巢功能，後剪線頭長2mm
KLD2000A is equipped Bird's Nest Prevention. The remaining thread length is 2mm.
- **KLD2010** 右切布刀由馬達獨立驅動
KLD2010 Right edge trimmer is motor-drive independently.



KLD960A
單步進型(按鍵屏, 倒縫棒)
One - Stepping Motor Type
(Keypad Type, Reverse feed lever)



KLD1000A
雙步進型(按鍵屏)
Two - Stepping Motor Type
(Keypad Type)



KLD1000 NF
雙步進型針送布(觸控屏)
Two - Stepping Motor Type Needle Feeding
(Touchpad)



KLD1010
雙步進型右修布刀(觸控屏)
Two - Stepping Motor Type
Right Edge Trimmer (Touchpad)



KLD1010 NF
雙步進型針送布右切刀(觸控屏)
Two - Stepping Motor Type
Needle Feeding with Right Edge Trimmer
(Touchpad)



KLD2000A
三步進型(按鍵屏)
3 - Stepping Motor Type (Keypad Type)



KLD2000
三步進型(觸控屏)
3 - Stepping Motor Type (Touchpad)



KLD2010
三步進型右修布刀(觸控屏)
3 - Stepping Motor Type
Right Edge Trimmer (Touchpad)



精機機械廠股份有限公司
CHING CHI MACHINE CO., LTD
<http://www.kingtexsewing.com.tw>

