

Automation

效率高/ 品質穩定

High Efficiency / Stable Quality

KA-BH/11-F-356

YouTube




微信


輸送帶平台式下擺/袖口折縫

Conveyor Flat type Bottom/Sleeve Hemming

特點/ Feature

1. 標準化的車縫品質，排除人工作業的差異。只需人工上料，其餘工序自動完成
Standardized sewing quality eliminates differences in manual work. Only manual loading, and the rest of the process is completed automatically.
2. 以輸送帶傳送，配備電子式導邊系統，入布精準，效率高
The transmission is done by conveyor with electronic hemming guide system, which the fabric loading is accurate and efficient.
3. 適用下擺／袖口／口袋等多種的平面式折縫。
The hemming of bottom/ sleeve/ pocket is applicable.
4. 標配自動收料功能，並可選備自動上料系統。
Auto stacking is a standard function. Moreover, auto-material loading system is optional.

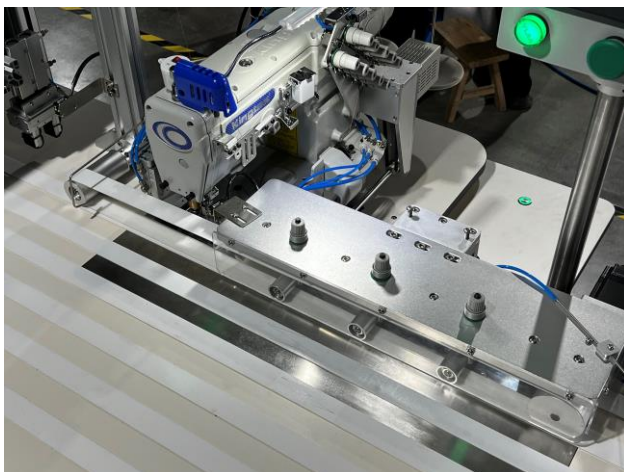

型號 Model	KA-BH/ 11-F-□□□
縫紉機機頭 Machine Head	CTD 9311
車縫速度 Sewing Speed	Max. 3500spm
針距規格 Gauge	240, 348, 356, 364
適用布料 Applicable Material	針織布/彈性布 Knits/ Elastic fabric
應用範圍 Application Range	①下擺寬度: 10~80 cm ②折邊寬度: 1.5~3.5 cm 
產能 Production Capacity	600~900 pcs/hr
電力需求 Power	220V, 1000W
空壓需求 Compressed Air	4 Bar, 240L/min
機器尺寸 Machine Dimension (W x D x H)	230 x 61 x 145 cm
淨重/毛重 Net/ Gross Weight	___ kg/ ___ kg