

KINGTEX

CT/ CX SERIES

CYLINDER BED INTERLOCK

筒型繙縫機



CXM2085

CT9085 - 0 - 356M / UCP - A3 / RPC03 / CS001

針數 /
No of Needle

針距 /
Needle
Distance

布料厚度 / 針板舌

Fabric Thickness / Needle Plate Tongue

L: 薄布料
Light

M: 中
Medium


H: 厚布料
Heavy

S: 特殊
Special


S1: 特殊
Special

W: 薄平織
Light Woven


	機型 / Machine Type								車縫應用 / Application Code							選配件 / Optional Device		
	直驅 Direct- Drive	上送 Top Feeding	細筒 Small Cylinder	短針棒 Upper Sealed N/B	內縮筒 Indent Shape Cylinder	極細筒 Extra Small Cylinder	左切刀 Left Edge Trimmer	特厚 Extra Heavy	00 一般 General	03 上帶 Tape Binding	11 下擺 Hemming	13 壓骨 Covering	42 環帶 Tubular Band	60 四針 4-Needle Lapseam	85 右切 Right Trimme	自動切線 Thread Trimmer	密縫 Condensed Stitch	後拖輪 Rear Puller
CT90									●	●	●	●	●	●	●	UCP-A	CS001 (CT9085) CS01P (CT9085+RP)	RPC03
CT92								●	●							UCE-A	CS002 (CT9000/CT9013)	
CT93							●				●						CS003	RPC04
CT97			●								●	●		●		UCP-C	CS004 CS04P (+ RP)	
CT98			●				●				●					UCE-C	CS04A	RPC03
CTD90	●								●	●	●	●	●	●	●	UCP-B	CS001 (CT9085) CS01P (CT9085+RP)	
CTD92	●							●	●							UCE-B	CS002 (CT9000/CT9013)	RPC04
CTD93	●						●				●						CS003	
CTD97	●		●								●	●		●		UCP-D	CS004 CS04P (+ RP)	RPC03
CTD98	●		●				●				●					UCE-D	CS04A	
CTU90	●	●							●		●	●		●		UCP-FB		RPC08
CTU91	M	●				●					●	●		●		UCE-FB		
CTU92	M	●						●	●							UCP-FS		RPC04
CTU93	M	●					●				●					UCE-FS		
CTU97	M	●	●								●	●		●		UCP-FD		RPC03
CTU98	M	●	●				●				●					UCE-FD		
CTM97	M		●								●	●		●		UCP-D	CS004 CS04P (+ RP)	RPC08
CTM98	M		●				●				●					UCE-D	CS04A	
CXM20	M							●	●		●	●	●	●	●	UCP-X	CS005 CS05P (+ RP)	RPC04
CXM22	M							●	●		●							
CXM23	M						●				●	●				UCP-D	CS004 CS04P (+ RP)	RPC08
CXM25	M				●				●		●	●		●				
CXM27	M		●								●	●		●		UCP-X	CS005 CS05P (+ RP)	RPC04
CXM28	M		●				●				●					UCE-X		
CXU20	M	●						●	●		●	●		●		UCP-FX	CS004 CS04P (+ RP)	RPC08
CXU22	M	●						●	●		●							
CXU23	M	●					●				●					UCP-FD	CS004 CS04P (+ RP)	RPC04
CXU25	M	●			●				●		●	●		●				
CXU27	M	●	●								●	●		●		UCP-FD	CS004 CS04P (+ RP)	RPC08
CXU28	M	●	●				●				●							
CXM40	M			●					●		●	●	●	●	●	UCP-X	CS005 CS05P (+ RP)	RPC04
CXM42	M			●				●	●									
CXM43	M			●			●				●					UCP-D	CS004 CS04P (+ RP)	RPC08
CXM45	M			●	●				●		●	●		●				
CXM47	M		●	●							●	●		●		UCP-X	CS005 CS05P (+ RP)	RPC04
CXM48	M		●	●			●				●					UCE-X		
CXU40	M	●		●				●	●		●	●		●		UCP-FX	CS004 CS04P (+ RP)	RPC08
CXU42	M	●		●				●	●		●							
CXU43	M	●		●			●				●					UCP-FD	CS004 CS04P (+ RP)	RPC04
CXU45	M	●		●	●				●		●	●		●				
CXU47	M	●	●	●							●	●		●		UCP-FD	CS004 CS04P (+ RP)	RPC08
CXU48	M	●	●	●			●				●							

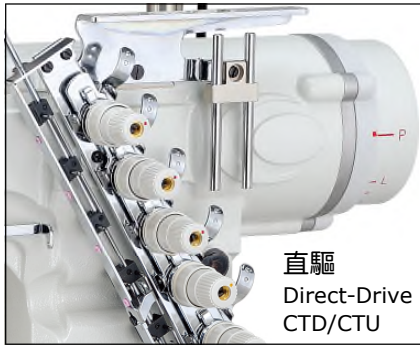

直驅
Direct-Drive
CTD/CTU

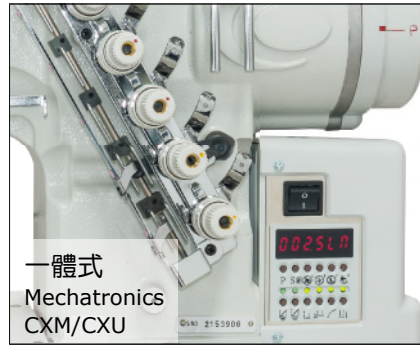

一體式
Mechatronics
CXM/CXU

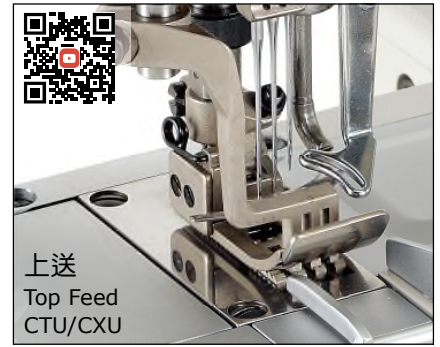

上送
Top Feed
CTU/CXU


針棒上端密閉式
Needle Bar Upper Sealed
CXM 40/ CXM 43/ CXM 47/ CXM 48

NEW



NEW

內縮型筒嘴
Indent Shape Cylinder
CXM 25/ CXM 45

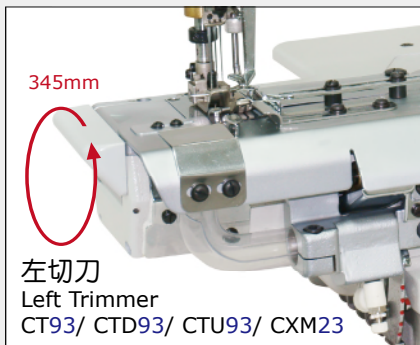


345mm

左切刀
Left Trimmer
CT93/ CTD93/ CTU93/ CXM23




280mm

標準筒型
Standard Bed
CT90/ CTD90/ CTU90/ CXM20/ CXU20

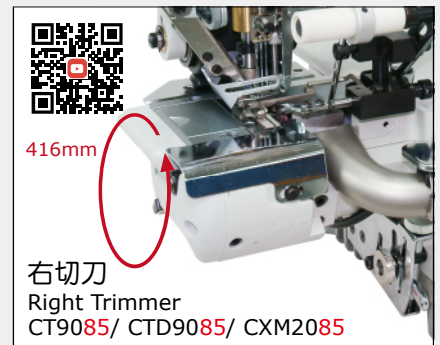


416mm

右切刀
Right Trimmer
CT9085/ CTD9085/ CXM2085

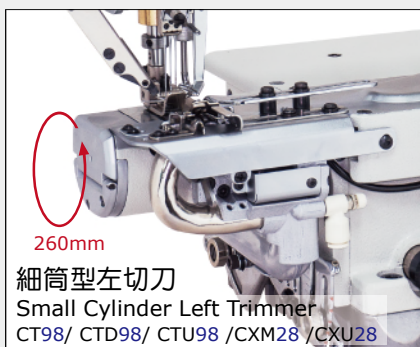




260mm

細筒型左切刀
Small Cylinder Left Trimmer
CT98/ CTD98/ CTU98/ CXM28/ CXU28

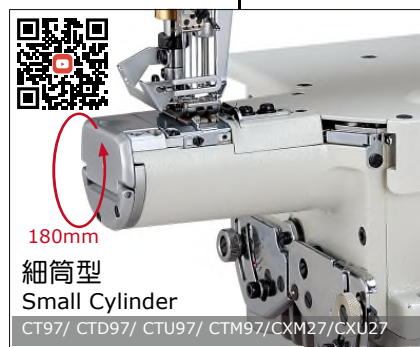


180mm

細筒型
Small Cylinder
CT97/ CTD97/ CTU97/ CTM97/ CXM27/ CXU27

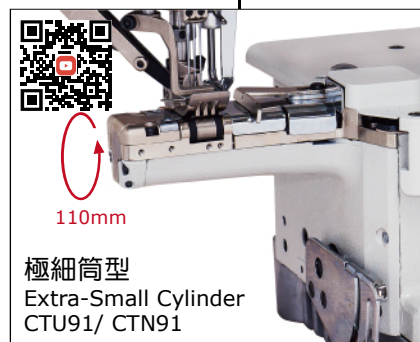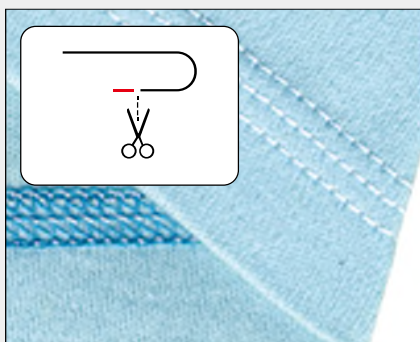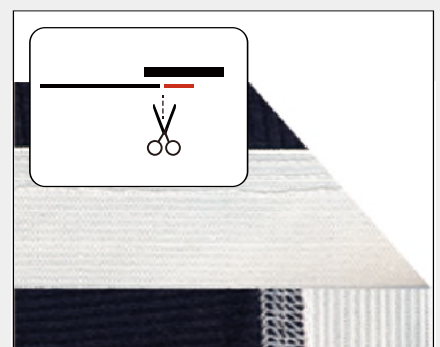

110mm

極細筒型
Extra-Small Cylinder
CTU91/ CTN91

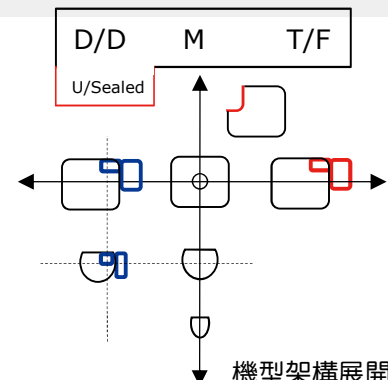

機型架構展開
Subclass Matrix

CXM2500


基本型
Basic Type

CXM4500

針棒上端密封式
Needle Bar Upper Sealed Type

內縮型筒嘴筒型繃縫機

Indent Shape Cylinder Type Cylinder Bed Interlock Sewing Machine

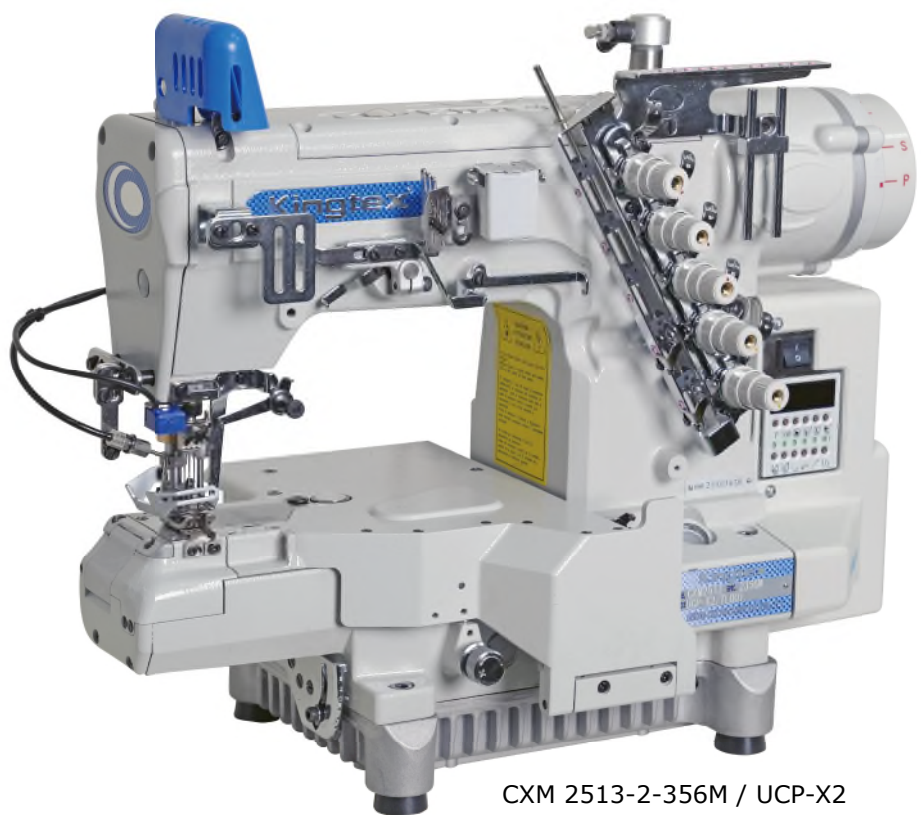


CXM 2513-2-356M / UCP-X2




內縮型筒嘴設計，可降低裁片阻力與增加手持空間，提升車縫作業性。

With the Indent shape cylinder, the machine reduces the resistance of fabric and increases the handling space for better operation

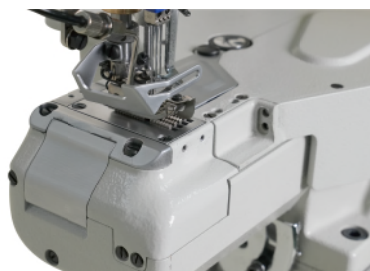

CXM2511

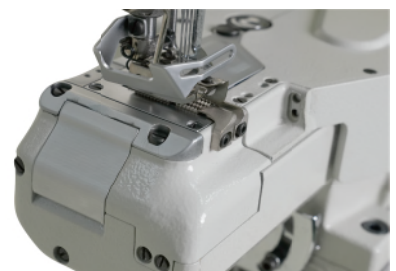

CXM2513

CXM2811

基本型
Basic Type

CXU2811

上送型
Top Feeding Type

小筒附左修布刀繙縫機

Small Cylinder with Left Edge Trimmer Interlock Sewing Machine




CXU 2811-0-356M / UCP-FD6



延續既有機型優勢，再優化護針片機構，提升車縫性能。

Continuing the strength of the current model, we further optimized the needle guard mechanism to upgrade the sewing performance.

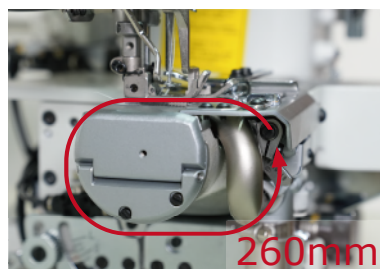

CXM4000

針棒上端密封式筒型繃縫機

Needle Bar Upper Sealed Type Cylinder Bed Interlock Sewing Machine

CXM 4000 基本型

Basic Type

CXM 4311 左修布刀型

Left Edge Trimmer Type

CXM 4500 筒嘴內縮型

Indent Shape Cylinder Type

CXM 4700 小筒型

Small Cylinder Type

CXM 4811 小筒左修布刀型

Small Cylinder with Left Edge Trimmer Type



CXM 4311-0-356M / UCP-X6 /
AP015/ CS005



針棒上端密封，油氣零滲漏。
針棒縮短而輕量化的效果，高速車縫時，振動
與噪音更小。

The needle bar is upper sealed which ensures zero leakage of oil.
The shortened and lightweight needle bar reduces vibration and noise during high-speed sewing.



CTU9100

上送極細管繃縫機

Top Feed, Extra Small Cylinder Bed Coverstitch Interlock Machine

CTU 9111 標準型 / 前後上送
Standard Type / Front and Rear Top Feeding

CTU 9111 特殊應用 / 無上送
Special Application / No Top Feeding

CTU 9113 壓骨車縫 / 後上送
Covering Stitch / Rear Top Feeding











CTU 9113-0-356M/UCP-FS1

超小筒CTU 9100系列送布力升級，並推出多樣針位組配套，增加縫製應用的完整度。

Super small cylinder CTU 9100 series upgrades the feeding performance and is equipped with various gauge sets for more complete sewing applications.



車縫應用 / SEWING APPLICATION



00			 m.m.	 m.m.		 m.m.	 UY128 GAS	 S.P.M.	OPTIONAL DEVICE
CT 9000-0-□□□L CTD9000-0-□□□L	2 3	4 5	4.0/4.8 4.8/5.6/6.4	1.4~3.6	1:0.3 2 1:2.9	5	#10	6000	UCP-□ UCE-□ RP003
CT 9000-0-□□□M CTD9000-0-□□□M	2 3	4 5	4.0/4.8 4.8/5.6/6.4				#11		
CT 9000-0-□□□H CTD9000-0-□□□H	2 3	4 5	4.0/4.8 4.8/5.6/6.4				#14		
CT 9000-0-□□□S CTD9000-0-□□□S	2 3	4 5	4.0 4.8/5.6/6.4				#11		
CT 9000-0-□□□S1 CTD9000-0-□□□S1	2 3	4 5	4.0 4.8/5.6/6.4						
CT 9000-0-□□□W CTD9000-0-□□□W	3	5	5.6/6.4				#14		
CT 9200-0-□□□H CTD9200-0-□□□H	3	5	5.6/6.4					4500	
CXM2000-0-□□□L	2 3	4 5	4.0/4.8 4.8/5.6/6.4				1.4~3.6	1:0.3 2 1:2.9	
CXM2000-0-□□□M	2 3	4 5	4.0/4.8 4.8/5.6/6.4	#11					
CXM2000-0-□□□H	2 3	4 5	4.0 4.8/5.6/6.4	#14					
CXM2000-0-□□□H1	3	5	5.6	#14					
CXM2000-0-□□□S	2 3	4 5	4.0/4.8 4.8/5.6/6.4	#11					
CXM2000-0-□□□S1	2 3	4 5	4.0/4.8 4.8/5.6/6.4						
CXM2000-0-□□□S2	3	5	5.6/6.4						
CXM2000-0-□□□S3	3	5	5.6/6.4						
CXM2000-0-□□□W	3	5	5.6/6.4	#14					
CXM2000-0-□□□H	3	5	5.6/6.4		4500				



一般車縫 General Seaming


本機型為三針車基本規格，適用範圍含蓋薄至厚各種面料，可選配附件以進行各類車縫。

The basic model is with full specification for the all range of fabric thickness. Various devices are optional for sewing applications.



CT9000

03			 m.m.	 m.m.		 m.m.	UY128 GAS 	 S.P.M.	OPTIONAL DEVICE
CT 9003-0-□□□M CTD9003-0-□□□M	2	4	3.2	1.4~3.6	1:0.3 ~ 1:2.9	5	#11	6000	UCP-□ UCE-□ RP003
	2	4	4.0						
	2	4	4.8						
	3	5	5.6						
	3	5	6.4						



上帶滾邊車縫 Tape Biding


本機型適用於T恤領口，運動褲褲管口之滾邊車縫。

For tape binding on the openings of T-shirt and sports short.



CT9003

11			 m.m.	 m.m.		 m.m.	UY128 GAS 	 S.P.M.	OPTIONAL DEVICE
CT 9011-0-□□□M CTD9011-0-□□□M	2	4	4.0/4.8	1.4~3.6	1:0.3 ~ 1:2.9	5	#11	6000	UCP-□ UCE-□ RP003
	3	5	5.6/6.4						
CT 9711-0- □□□M CTD9711-0- □□□M	2	4	4.0/4.8					4500	UCP-□ UCE-□ RP004
	3	5	5.6/6.4						
CTM9711-0-□□□M CXM2711-0-□□□M	2	4	4.0/4.8					4500	UCP-D UCE-D RP004
	3	5	5.6/6.4						
CTU9111-0-□□□M	2	4	4.0/4.8					3000	UCP-FS UCE-FS
	3	5	4.8/5.6/6.4						




下擺/袖口折縫 Hemming

從下擺折縫、袖口折縫到嬰兒衣袖口折縫，有各3種規格的筒嘴（外徑：280/ 180/ 110 mm）可以對應各種車縫需求。


For the hemming of T-shirt Bottom, sleeve, and infant wear, there are 3 kinds of cylinder bed (circumference: 280/ 180/ 110 mm) to meet the demands.



CTD9711(180mm)

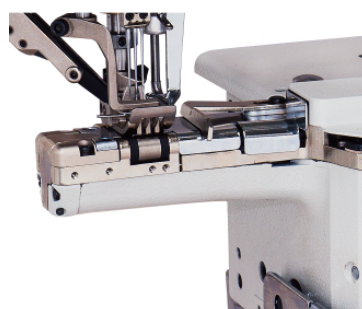


CTU9111(110mm)

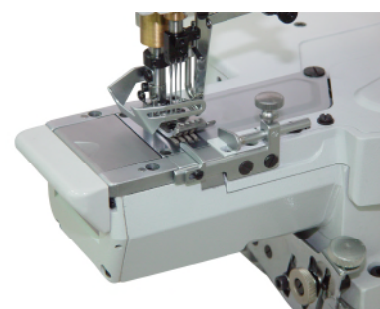

CT9011(280mm)

11 ✂			 m.m.	 m.m.		 m.m.	 UY128 GAS	 S.P.M.	OPTIONAL DEVICE
CT9311-0-□□□M	2	4	4.0/4.8	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-□ UCE-□ CV17A TR02A CS003 RPC03
CT9311-0-□□□S	3	5	4.8/5.6/6.4						
CTD9311-0-□□□M	2	4	4.0/4.8	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-D UCE-D CV TR02A CS003 RPC03
CTD9311-0-□□□S	3	5	5.6/6.4						
CT9811-0-□□□M	2	4	4.0	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-D UCE-D CV TR02A CS04A RPC04
CT9811-0-□□□L	3	5	4.8/5.6/6.4						
CT9811-0-□□□S	2	4	4.0	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-D UCE-D CS04A RPC04
CT9811-0-□□□S1	3	5	4.8/5.6/6.4						
CTD9811-0-□□□M	2	4	4.0	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-D UCE-D CS04A RPC04
CTD9811-0-□□□L	3	5	4.8/5.6/6.4						
CTD9811-0-□□□S	2	4	4.0	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-X5 UCP-X6 CS005 RP008 RPC08
CTD9811-0-□□□S1	3	5	4.8/5.6/6.4						
CTM9811-0-□□□M	2	4	4.0	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-X5 UCP-X6 CS005 RP008 RPC08
CTM9811-0-□□□L	3	5	4.8/5.6/6.4						
CXM2811-0-□□□M	2	4	4.0	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-X5 UCP-X6 CS005 RP008 RPC08
CXM2811-0-□□□L	3	5	4.8/5.6/6.4						
CXM2311-0-□□□M	2	4	4.0/4.8	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-X5 UCP-X6 CS005 RP008 RPC08
CXM2311-0-□□□L	3	5	4.8/5.6/6.4						
CXM2311-0-□□□H	2	4	4.0/4.8	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-X5 UCP-X6 CS005 RP008 RPC08
CXM2311-0-□□□L	3	5	4.8/5.6/6.4						
CXM2311-0-□□□S	2	4	4.0	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-X5 UCP-X6 CS005 RP008 RPC08
CXM2311-0-□□□S1	3	5	4.8/5.6/6.4						
CXM2311-0-356L	2	4	4.0	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-X5 UCP-X6 CS005 RP008 RPC08
CXM2311-0-356S2	3	5	5.6/6.4						





下擺/左切刀修布邊 Hemming / Left fabric edge trimmer

在進行下擺折縫之前，先以左切刀修齊布邊，以達完美的車縫品質。


另外，CTD9811 與 CXM2311標配吹氣式防捲布功能。

Hemming with pre-cutting function by the left fabric edge trimmer.


Moreover, CTD9811 and CXM2311 are equipped with air-blow type anti-curling edge function.



CT9311 / CTD9311




CTD9811

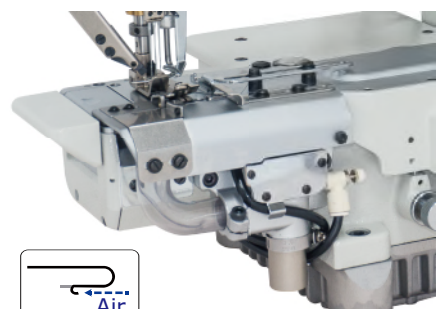

CXM2311

13			 m.m.	 m.m.		 m.m.	UY128 GAS 	 S.P.M.	OPTIONAL DEVICE
CT 9013-0-□□□M CTD9013-0-□□□M	2 3	4 5	4.0/4.8 4.8/5.6/6.4	1.4~3.6	1:0.3 2 1:2.9	5	#11	6000	UCP-□ UCE-□ RP003
CT 9013-1-□□□M CTD9013-1-□□□M	2 3	4 5	4.0/4.8 4.8/5.6/6.4						
CT 9013-2-□□□M CTD9013-2-□□□M	2 3	4 5	4.0 4.8/5.6/6.4						
CT 9713-0-□□□M CTD9713-0-□□□M	2 3	4 5	4.0 4.8/5.6/6.4						
CT 9713-1-□□□M CTD9713-1-□□□M	2 3	4 5	4.0 4.8/5.6/6.4	1.4~3.6	1:0.3 2 1:2.9	5	#11	6000	UCP-□ UCE-□ RP004
CT 9713-2-□□□M CTD9713-2-□□□M	3 3	5 5	4.0 4.8/5.6/6.4						
CTM9713-0-□□□M CXM2713-0-□□□M	2 3	4 5	4.0 4.8/5.6/6.4						
CTM9713-1-□□□M CXM2713-1-□□□M	2 3	4 5	4.0 4.8/5.6/6.4						
CTM9713-2-□□□M CXM2713-2-□□□M	2 3	4 5	4.0 4.8/5.6/6.4	1.4~3.6	1:0.3 2 1:2.9	5	#11	6000	UCP-D UCE-D RP004 RPC04
CXM2013-0-□□□M	2 3	4 5	4.0 4.8/5.6/6.4						
CXM2013-1-□□□M	2 3	4 5	4.0 4.8/5.6/6.4						
CXM2013-2-□□□M	2 3	4 5	4.0/4.8 4.8/5.6/6.4						




拷克骨壓縫

Overlock Seam Covering Stitch

拷克骨壓縫有倒骨式(適用4線拷克)，
與立骨式(適用3線拷克)

Overlock seam covering stitch by
Fold type
(4-thread overlock seam applicable)
and Flattening type
(3-thread overlock seam applicable)

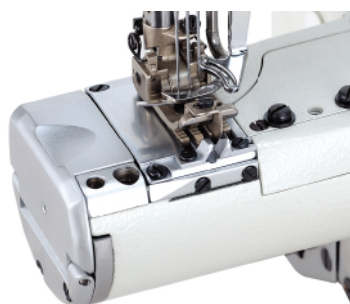


CT9713-0



CXM2013-2

13-0

倒骨式
Fold type





13-1

立骨式
Flattening type




13-2

倒骨式
Fold type



42			 m.m.	 m.m.		 m.m.			OPTIONAL DEVICE
CT 9042-0-3□□M CTD9042-0-3□□M	3	5	5.6 6.4	1.4~3.6	1:0.3 ? 1:2.9	5	#11	5500	UCP-□ UCE-□ RP003
CT 9042-2-3□□M CTD9042-2-3□□M	3	5	5.6 6.4						
CXM2042-2-356M CXM2042-2-364M	3	5	5.6 6.4	1.4~3.6	1:0.3 ? 1:2.9	5	#11	5500	UCP-X UCE-X RP008 CS005




環形針織褲腰鬆緊帶接縫 Knitted Elastic Ring Attaching



導布器以膝動開關操作，由空壓設備提供動力，
有氣動閥式(42-0) 與機械閥式(42-2) 可供選擇

The tape guide is controlled by knee switch and
is powered by air compressor.
The options are pneumatic
valve type (42-0) and
mechanical valve type (42-2).

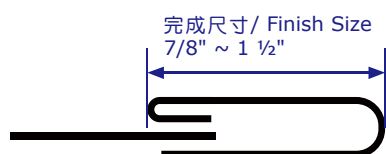

CT9042-0



CT9042-0 (氣動式/Pneumatic type)




CT9042-2 (膝動式/Manual type)




CXM2042-2 (膝動式/Manual type)

60			 m.m.	 m.m.		 m.m.			OPTIONAL DEVICE
CT 9060-0-4□□M CTD9060-0-4□□M CXM2060-0-4□□M	4	6	5.2/5.6 6.0/6.4	1.4~3.6	1:0.7 ? 1:2.0	5	#11	6000	UCP-□□
CT 9760-0-4□□M CTD9760-0-4□□M CTM9760-0-4□□M CXM2760-0-4□□M			5.6/6.0/6.4						



四針六線併縫 4-Needle 6-Thread Flatseaming




CT9760



CT9060

85			 m.m.	 m.m.		 m.m.	UY128 GAS 	 S.P.M.	OPTIONAL DEVICE
CT9085-0-240-M	2	4	4.0	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-A RP003 CS005
CT9085-0-248-M	2	4	4.8						
CT9085-0-356-M	3	5	5.6						
CT9085-0-364-M	3	5	6.4						
CTD9085-0-240-M	2	4	4.0	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-B RP003 CS005
CTD9085-0-248-M	2	4	4.8						
CTD9085-0-356-M	3	5	5.6						
CTD9085-0-364-M	3	5	6.4						
CXM2085-0-240-M	2	4	4.0	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-X RP008 CS005
CXM2085-0-248-M	2	4	4.8						
CXM2085-0-356-M	3	5	5.6						
CXM2085-0-364-M	3	5	6.4						



環形鬆緊帶褲腰接縫/右切刀修布邊

Elastic Waistband Ring Attaching/ Right Fabric Edge Trimming




在進行環形鬆緊帶褲腰接縫之前，先以右切刀修齊布邊，以達完美的車縫品質。


另外，CXM2085 標配吹氣式壓腳，具有防捲布功能。

Elastic waistband ring attaching with pre-cutting function by the right fabric edge trimmer.

Moreover, CXM 2085 is equipped with air-blow type presser foot for anti-curling edge function.

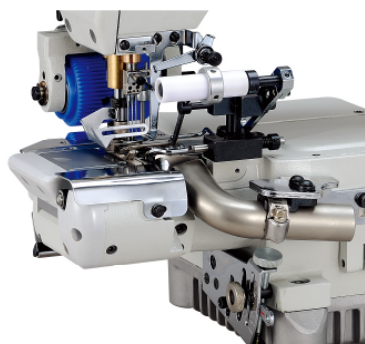

CT9085 / CTD9085




CXM2085



AF001: Air-blow type Presser foot

車縫應用 / SEWING APPLICATION

U			 m.m.	 m.m.			 m.m.	 m.m.	 S.P.M.	OPTIONAL DEVICE	SEWING APPLIC- ATION									
CTU9000-0-□□□M	3	5	5.6/6.4	1.4~3.6	1:0.3 ? 1:2.9	1~6	5	#11	5500	UCP-FB UCE-FB	00									
CTU9200-0-□□□H								#14	4500											
CXU2000-0-□□□M CXU2000-0-□□□W CXU2000-0-□□□L CXU2000-0-□□□S CXU2000-0-□□□S1 CXU2000-0-□□□S2 CXU2000-0-□□□S3 CXU2000-0-□□□H	3	5	5.6/6.4					#11	6000	UCP-FX UCE-FX										
CXU2000-0-□□□H1												#14								
CXU2200-0-□□□H												4500								
CTU9011-0-□□□W												3	5	5.6/6.4	1.4~3.6	1:0.3 ? 1:2.9	1~6	5	#11	5500
CTU9011-0-□□□M CTU9011-0-□□□H CTU9011-0-□□□L CTU9011-0-□□□S CTU9011-0-□□□S1	2	4	4.0																	
CTU9111-0-□□□M								3	5	4.8/5.6/6.4										
CTU9111-0-□□□M	2	4	4.0/4.8					0.8~3.3	-	3000		UCP-FS UCE-FS								
CTU9711-0-□□□M	3	5	4.8/5.6/6.4																	
CTU9711-1-□□□M	2	4	4.0	1.4~3.6	1:0.3 ? 1:2.9	1~6	5	#11	4500	UCP-FD UCE-FD	11									
CTU9711-0-□□□L	3	5	4.8/5.6/6.4																	
CTU9711-0-□□□X	3	5	4.8/5.6/6.4																	
CTU9711-0-0100H																				
CXU2011-0-□□□M CXU2011-0-□□□L CXU2011-0-□□□S CXU2011-0-□□□S1 CXU2011-0-□□□H	2	4	4.0																	
CXU2711-0-□□□M												3	5	4.8/5.6/6.4						
CXU2011-0-□□□W	3	5	5.6									1.4~3.6	1:0.3 ? 1:2.9	1~6	5	#11	4500	UCP-FD UCE-FD	13	
CXU2711-0-□□□M	2	4	4.0																	
CTU9013-0-□□□M CTU9013-1-□□□M CTU9013-2-□□□M	3	5	5.6/6.4									1.4~3.6	1:0.3 ? 1:2.9	1~6	5	#11	5500	UCP-FB UCE-FB	60	
CTU9113-0-356M CTU9113-0-364M												0.8~3.3	-				3000	UCP-FS UCE-FS		
CXU2013-0-□□□M CXU2013-1-□□□M CXU2013-2-□□□M				1.4~3.6	1:0.3 ? 1:2.9	6000	UCP-FX UCE-FX													
CTU9060-0-460M				1.4~3.6	1:0.3~ 1:2.9	5500	UCP-FBA UCP-FBC													
CTU9160-0-460M	4	6	6.0	0.8~3.3	-	1~6	5	MY1014B #11	3000	UCP-FSA UCP-FSC	60									
CTU9760-0-460M				1.4~3.6	1:0.3 ? 1:2.9				4500	UCP-FDA UCP-FDC										
CXU2060-0-460M				1.4~3.6	1:0.3 ? 1:2.9				5500	UCP-FXA UCP-FXC										



上送機型
Top Feed Models




CXU2000




CTU9711



CTU9111



U			 m.m.	 m.m.			 m.m.	UY128 GAS 	 S.P.M.	OPTIONAL DEVICE	SEWING APPLIC- ATION
CTU9311-0-□□□M	2	4	4.0/4.8	1.4~3.6	1:0.3 ↕ 1:2.9	1~6	5	#11	4500	UCP-FB UCE-FB	
CTU9311-0-□□□H	3	5	4.8/5.6/6.4								
CTU9311-0-356L	3	5	5.6								
CTU9311-0-□□□S	2	4	4.0								
CTU9311-0-□□□S1	3	5	4.8/5.6/6.4								
CTU9311-0-□□□S2	3	5	5.6/6.4								
CTU9811-0-□□□M	2	4	4.0	1.4~3.6	1:0.3 ↕ 1:2.9	1~6	5	#11	4500	UCP-FD UCE-FD	
CTU9811-0-□□□L	3	5	4.8/5.6/6.4								
CTU9811-0-□□□S											
CTU9811-0-□□□S1											
CXU2311-0-□□□M	2	4	4.0/4.8	1.4~3.6	1:0.3 ↕ 1:2.9	1~6	5	#11	5000	UCP-FX5 UCE-FX6	
CXU2311-0-□□□H	3	5	4.8/5.6/6.4								
CXU2311-1-□□□M											
CXU2311-1-□□□H	3	5	4.8/5.6/6.4								
CXU2311-0-356L	3	5	5.6								
CXU2311-0-□□□S	2	4	4.0								
CXU2311-0-□□□S1	3	5	4.8/5.6/6.4								
CXU2311-1-□□□S											
CXU2311-1-□□□S1	3	5	4.8/5.6/6.4								
CXU2311-0-□□□S2	3	5	5.6/6.4								
CXU2811-0-□□□M	2	4	4.0	1.4~3.6	1:0.3~ 1:2.9	1~6	5	#11	4500	UCP-FD UCE-FD	
		3	5								



上送機型 Top Feed Models

上送並搭配左切刀的高階機型，具有豐富規格，可對應各種車縫情形。

The high-end models of top feeding with left fabric edge trimmer, which have a wide range of specifications, can be used in various sewing situations.




CTU9311













CTU9811



CTU9111



CTU9311

	CTU9311	CTU9811		CXN2311-0	CXN2311-1
上送齒 Top Feed Deg					
壓腳 Presser Foot					


選配件 / OPTIONAL DEVICE

自動切線組

Auto Thread Trimmer Set

UCE-A1 ① ② ③ ④	① 自動切線裝置代號 Under bed thread trimmer device
	② 機型 C:方筒型繃縫機 F:平台型繃縫機 Model C:Cylinder bed interlock F:Flat bed interlock
	③ 動力 P:氣動式 E:電動式 Power P:Pneumatic Type E:Electric Type
	④ 裝置組合代號 Combination of devices

UCP-□□ UCE-□□

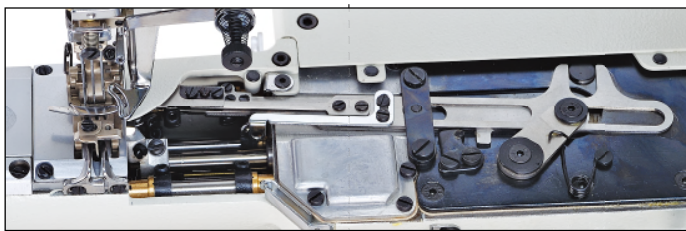

電動式切線組 Elastic Type Thread Trimmer

UCE -□□	下切 Under Trimmer	上切 Top Trimmer	撥線 Wiper (WPG)	抬壓腳 Presser Foot Lifter	適用機型 Application
A1	UTC04	STC02		✓	CT9000
A2			✓		
A3		STC02	✓*		
A4					
B1	UTC03	STC03		✓	CTD9000
B2			✓		
B3		STC03	✓*		
B4					
C1	UTC06	STC02		✓	CT9700
C2			✓		
C3		STC02	✓*		
C4					
D1	UTC07	STC03		✓	CTD9711 CXM2711
D2			✓		
D3		STC03	✓*		
D4					
X1	UTC09	STC03		✓	CXM2000
X2			✓		
X3		STC03	✓*		
X4					
FX1	UTC09F	STC04		✓	CXU2000
FX2			✓		
FX3		STC04	✓*		
FX4					
FS1	UTC10F	STC05		✓	CTU9111
FS2			WPG02		
FS3		STC05	WPG02*		
FS4					

* 包裝於附件箱中/ Packed in the accessories box

氣動式切線組 Pneumatic Type Thread Trimmer

UCP -□□	下切 Under Trimmer	上切 Top Trimmer	撥線 Wiper (WPC)	抬壓腳 Presser Foot Lifter	氣閥 Valve	適用機型 Application
A1	UTB02	STB02		✓	2	CT9000
A2			✓			
A3		STB02	✓*			
A4						
A5	UTG02	✓		✓	3	CT9311 CT9085
A6			✓			
A7		✓				
A8			✓			
A9	UTH02	✓	✓*	✓	3	CT9000 上下切獨立控制
AA		✓				
AB		✓				
AC		✓				
B1	UTB03	STB03		✓	2	CTD9000
B2			✓			
B3		STB03	✓*			
B4						
B5	UTG03	✓		✓	3	CTD9311 CTD9085
B6			✓			
B7		✓				
B8			✓			
B9	UTH03	✓	✓*	✓	3	CTD9000 上下切獨立控制
BA		✓				
BB		✓				
BC		✓				
CA	UTB05	STB02		✓	2	CTD9060
C1			✓			
C2		STB02	✓*			
C3						
C4	UTB06	✓		✓	2	CT9711
C5		STB02	✓*			
C6						
C7						
DA	UTB07	STB03		✓	2	CTD9711 CXM2711
D1			✓			
D2		STB03	✓*			
D3						
D4	UTG10	✓		✓	3	CT9811
D5			✓			
D6		✓				
D7			✓			
DA	UTB07B	✓		✓	2	CTD9760 CXM2760
X1		STB03				
X2			✓			
X3		STB03	✓*			
X4	UTB09	STB03		✓	2	CXM2000
X5			✓			
X6		STB03	✓*			
X7						
X8	UTG09	STB03		✓	3	CXM2311 CXM2085
X9			✓			
X10		STB03	✓*			
X11						
XA	UTH09	STB03		✓	3	CXM2000 上下切獨立控制
XB			✓			
XC		STB03	✓*			
XD						
FX1	UTB09B	STB04		✓	2	CXM2060
FX2			WPC03			
FX3		STB04	WPC03*			
FX4						
FX5	UTG09F	STB04		✓	3	CXU2311
FX6			WPC03			
FX7		STB04				
FX8			WPC03			
FX9	UTH09F	STB04	WPC03*	✓	3	CXU2000 上下切獨立控制
FX10						
FX11		STB04	WPC03*			
FX12						
FXA	UTB09BF	STB04		✓	2	CXU2060
FXB			WPC03*			
FXC		STB04	WPC03*			
FXD						
FS1	UTB10F	STB05		✓	2	CTU9111
FS2			WPC04			
FS3		STB05	WPC04*			
FS4						
FSA	UTB10BF	STB05		✓	2	CTU9160
FSC		STB05	WPC04			

* 包裝於附件箱中/ Packed in the accessories box

** 氣動UT組尾碼，無：SMC，C：氣立

空壓需求 Compressed Air	氣壓 Air Pressure (kgf/cm ²)	消耗量 * Consumption (liter/ min)
UCP (Thread Trimming Only)	4~5	10
UCP + Fabric Trimmer (CTD 9085/9311, CX 2085/2311)	5~6	40

* 經驗值供參考
* Empirical value for reference




密縫裝置 Condensed Stitch Device



CS	適用機型 Application
CS001	CT9085 / CTD9085
CS01P(+RP)	CT9085 / CTD9085
CS002	CT9000 / CTD9000 CT9013 / CTD9013
CS003	CT9311 / CTD9311
CS004	CT97□□ / CTD97□□ / CXM27□□
CS04P(+RP)	CT97□□ / CTD97□□ / CXM27□□
CS04A	CT9811 / CTD9811 / CXM2811
CS005	CXM20□□ / CXM2200 / CXM2311
CS05P(+RP)	CXM20□□ / CXM2200 / CXM2311

空壓需求: 5kg/ cm² 或 70 psi 以上
Air compressor: 5kg/ cm² or 70 psi above



CS004



CS005/CS05P

擴張滾輪組 Tubular Extending Roller Set



TR	TR001	TR02A	TR03A	TR05A	TR007
標配 Standard	CT□□42	MT4504P, MT4004P MTD4504P	CT9085, CXM2085		
選配 Optional		CT□□42, CT□□11, CT9085, CXM2085		CT□□42, CT□□85, CT9085, CXM2085	氣動式, 膝動開關 Pneumatic, Knee switch

後拖輪組 Rear Puller Set

RP	適用機型 Application	上下齒輪數 Upper / Lower Rollers (Teeth)		
		A (標配) Standard	E (選配) Optional	F (CT9042) (CXM2042)
RP003□ RPC03□	CT9000 CT9300			
RP004□ RPC04□	CT9700 CXD2700	上/Upper 30 下 / Lower 15	上/Upper 50 下 / Lower 25	上/下輪 橡膠平輪 Upper / Lower Flat Rubber
RP008□ RPC08□	CXM20□□			



RP003□
RPC03□



RP004□
RPC04□



RP008□
RPC08□

雙重上飾線 Double Covering Stitch

DC	適用機型 Application
DC001	CTD9000
DC002	CT9000



氣壓式壓腳穩壓裝置 Pneumatic Presser Foot Pressure Regulator


AP015, AP15A

具精密調壓閥，壓腳的壓力可精準設定，當車縫中面料厚度改變時，壓力保持穩定不變。
適用: CTD9000, CTD9711, CXD2711, CXM200.

With the air pressure valve, the pressure value is done by digital setting. When sewing across the material thickness changing, the pressure keeps constant.



AP015




AP15A



氣動式下擺折縫導布 Pneumatic Hemming Edge Guide

配備光學感應器，動作精準。
Equipped With optical sensor for accurate sewing.


EG	適用機型 Application
EG009	CT / CTD / CTU9011
EG010	CT / CTD / CTU9311

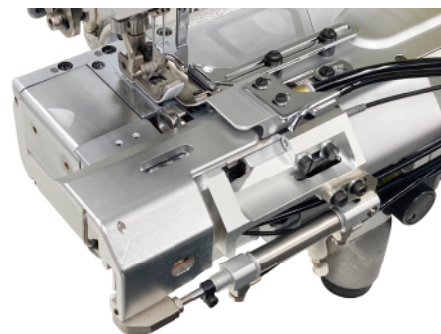

氣動式切帶 Pneumatic Tape Cutter

最大切斷寬 18mm，刀口距離壓腳 28mm
Max. cutting width 18 mm. The gap between knife and presser foot is 28 mm.

TCS	適用機型 Application
TCS31	CTD9700
TCS32	CXM2000

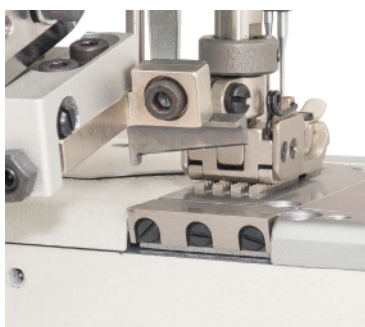

氣動式吹氣裝置



吹氣式布邊防捲裝置

Air-Blowing Type Anti-Curling Device

UN002

左切刀修布機型CT□9311適用，CTD 9811
與CXM 2311 為標準配備。

Left edge trimmer model, CT□9311, is
compatible. And it is standard equipment of
CT 9811 and CXM 2311.

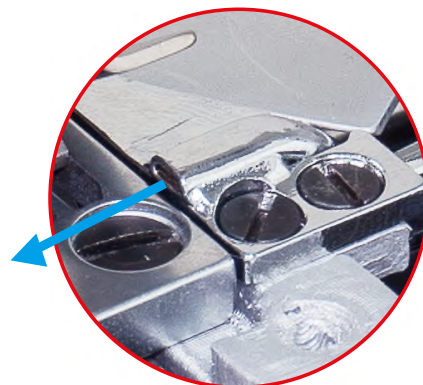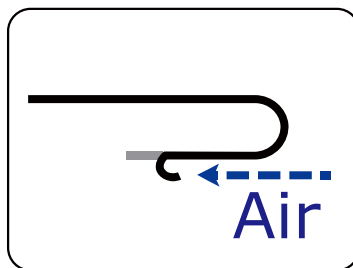

吹氣式布邊防捲裝置 〈專利〉

Air-Blowing Type Anti-Curling Presser Foot (Patent) UN002



AF01□

□ 針位/ Gauge

A: 240/ B: 248/ C: 356/ D: 364

右切刀修布機型CT/CTD 9085與 CXM 2085 適
用，CXM 2085 為標準配備。

The right edge trimmer models, CT/CTD 9085
and CXM 2085, are
compatible. And it is standard equipment of
CXM 2085.

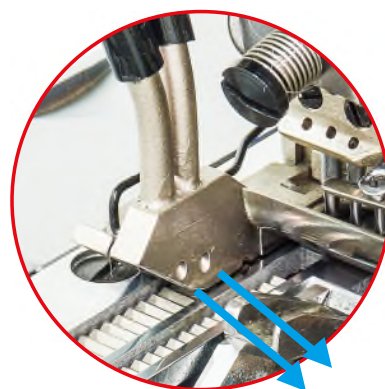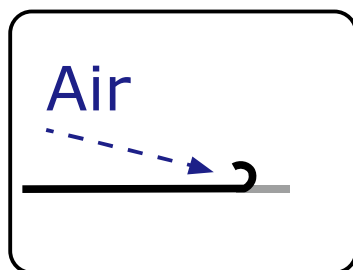

補強帶導模

Tape Binder

TB

TB 002 上送帶導布器

Top loading tape binder

TB 003 褲耳車縫

Belt loop sewing



TB 002



TB 003

步履式壓腳

Walking Foot

WF

對應送具的動作，壓腳可前後滑動，以產生最小壓布力，適用於薄布料
或易發生壓痕的面料。

Corresponding to the stroke of feed dog, the presser foot slides back
and forth to provide the minimum pressure, which is applicable
to light material or fabrics that are prone to creasing.





CT/ CX SERIES

CYLINDER BED INTERLOCK

筒型繃縫機



精機機械廠股份有限公司
CHING CHI MACHINE CO., LTD.

新北市板橋區三民路二段33號13樓
13F., NO.33, Sec2, San Min Rd. Panchiao Dist.,
New Taipei City, 22069 Taiwan.

Tel / 02-2961-6865 Fax / 02-2954-6007



The specification and / or appearances of the equipment described in this catalogue are subject to be changed without prior notice.
本目錄所述產品，因更新或改良，可能不事前預告，而對產品之外觀、規格、內容有所修改，特此聲明敬告諸覽。

CAT.NO.CT/CX-B03 / AUGUST 2025